

HELICAL PILES

MODEL P3

Shaft

Wall Thickness	0.216" (5.49 mm)
Round HSS Outside Diameter	3.5" (88.9 mm)
Available Standard Lengths	5'-3" (1.6 m) / 7'-0" (2.1 m) / 10'-6" (3.2 m)

Load Specifications

Max. Allowable Capacity*	33.75 kips (150.0 kN)
--------------------------	-----------------------

* Higher load ratings could be considered with site-specific engineering.



Technical Specifications

Commonly Used Structure	Heavy Residential
	Light to Medium Commercial
	Industrial
Code Evaluation	Listed per CCMC 13059-R
Standard Steel	ASTM A500 Grade C Fy=51 ksi min (350 MPa)
Black Steel Design Life	min. 50 years per CCMC 13059-R
Coating	Galvanized or Black Steel
Galvanization Compliance	ASTM A123/A123M
Additional Corrosion Protection	Cathodic Protection System available

Helix

Pitch	3" (76.2 mm) / 5" (127 mm)
Thickness	0.5" (12.7 mm)
Standard Steel	CSA G40.21-44W Fy=44 ksi min (300 MPa)
Coating	Galvanized or Black Steel
Multiple Welded Helix	Available
Helix Size*	8" (203 mm) to 24" (610 mm)

* Other sizes available upon request.

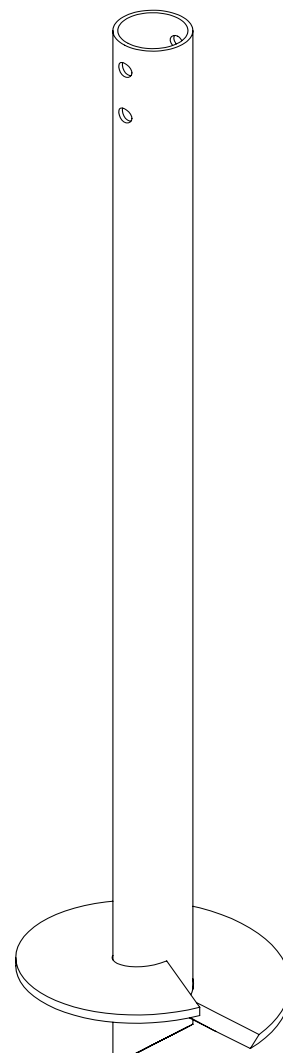


HELICAL PILES



MODEL P3

Sleeve (Available)

Function Utility	Protection against soil movements
Wall Thickness	1/16" (1.6 mm)
Outside Diameter	± 3.75" (± 95.2 mm)
Length	± 66" (± 1.67 m)
Weight	± 1.52 lb (± 0.69 kg)
Material	HDPE
Color	Green



Outside Couplings



	Regular	Expanded
Assembly	Welded	-
Wall Thickness	0.226" (5.74 mm)	0.188" (4.78 mm)
Round HSS Outside Diameter	4" (101.6 mm)	4" (101.6 mm)
Standard Steel	ASTM A500 Grade C Fy=51 ksi min (350 MPa)	ASTM A500 Grade C Fy=51 ksi min (350 MPa)
Length*	3.5" (88.9 mm)	2.5" (63.5 mm)

* Factory welded or welded on site.

Pile Caps

Wood Structure Connectors	Pages 33, 35, 37, 40, 42, 44, 45, 47, 48
Steel Structure Connectors	Pages 46
Concrete Construction Connectors	Pages 46, 49-51

Foundation Repair Brackets

Concrete Wall	Page 53
Concrete Masonry Unit (CMU) Wall	Pages 54-56
Interior Concrete Wall	Page 57