

1700, Setlakwe Street
 Theford Mines (QC) G6G 8B2
 CANADA
 www.technometalpost.com

CONFIDENTIAL

THE INFORMATIONS CONTAINED
 IN THIS DRAWING IS THE SOLE
 PROPERTY OF TECHNO PIEUX INC.
 ANY REPRODUCTION IN PART OR
 AS A WHOLE WITHOUT THE WRITTEN
 PERMISSION OF TECHNO METAL POST INC.
 IS PROHIBITED

REVISIONS

DATE	DESCRIPTION	REV.
26/06/2013	Revised load capacity.	1

Client :

Client address :



Project :

Drawing : **Techno Metal Post
 Model P5
 (Above ground light
 structure)**

Approved by :

Date : 2011-10-31
 Scale : N/A

Drawing no: P5-G-R1-A
 Page number : SHEET 1 OF 1

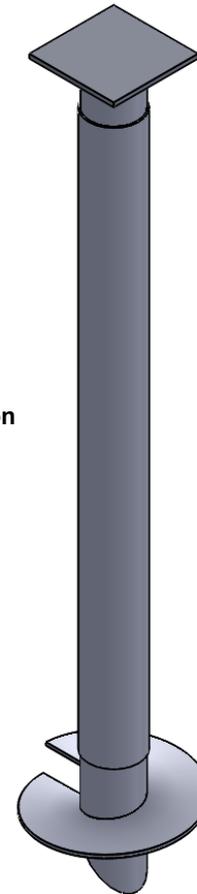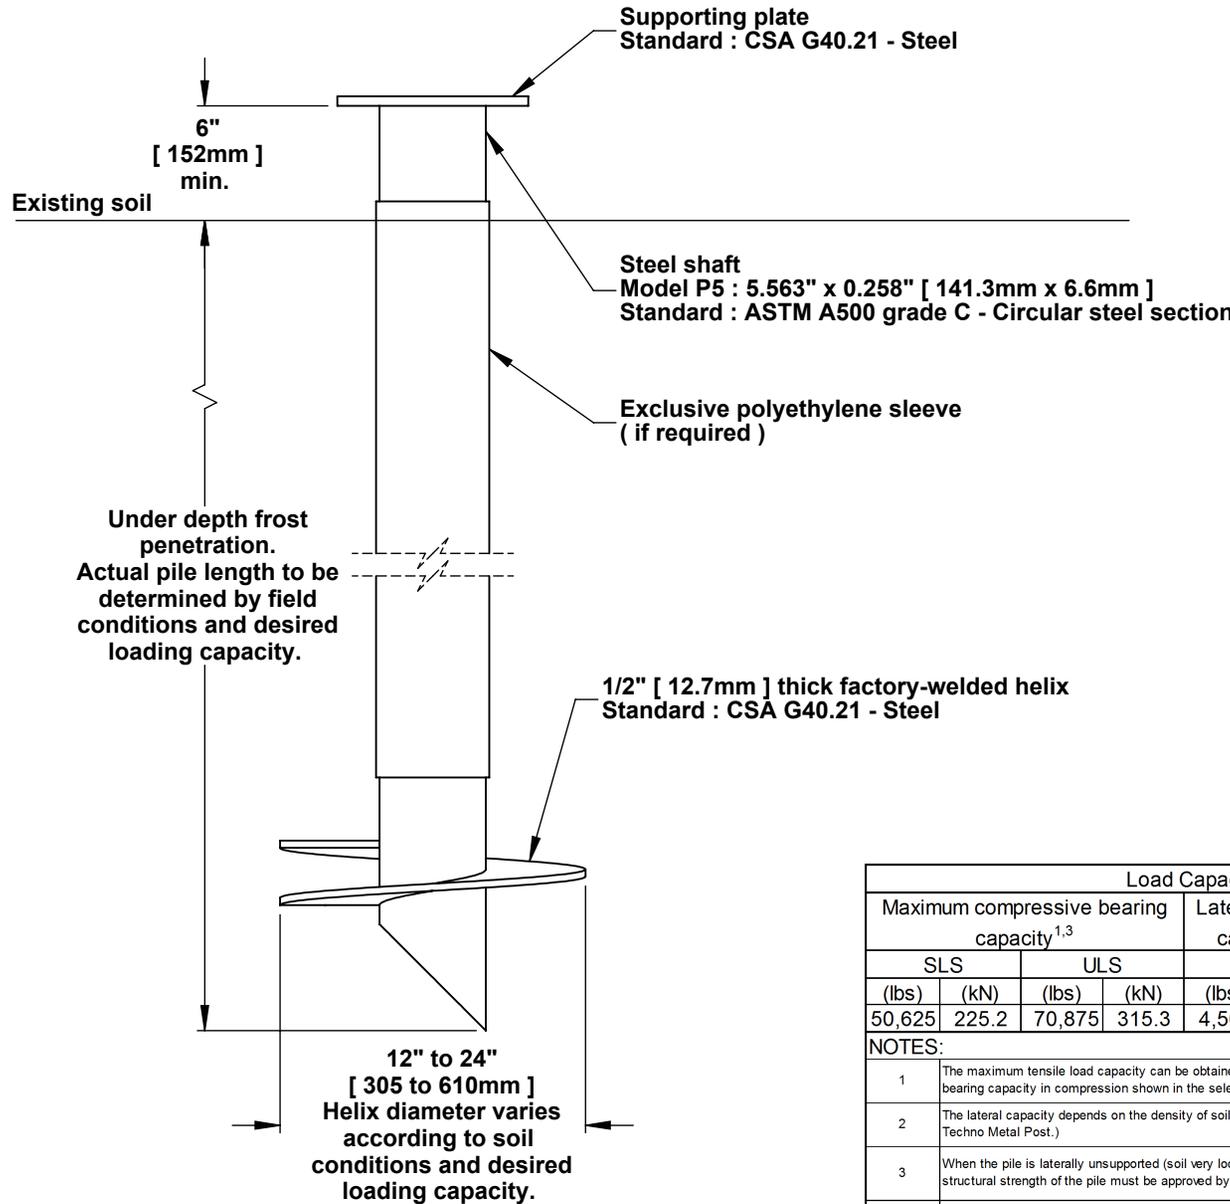

Load Capacity							
Maximum compressive bearing capacity ^{1,3}				Lateral bearing capacity ^{2,4}		Factored bending resistance	
SLS		ULS		SLS		ULS	
(lbs)	(kN)	(lbs)	(kN)	(lbs)	(kN)	(lbs.ft)	(kN.m)
50,625	225.2	70,875	315.3	4,500	20.0	21,316	28.9

NOTES:

- The maximum tensile load capacity can be obtained, conservatively, by halving the values of the bearing capacity in compression shown in the selection table.
- The lateral capacity depends on the density of soil (to validate consult technical department of Techno Metal Post.)
- When the pile is laterally unsupported (soil very loose / soft, liquefiable soils, water and air), the structural strength of the pile must be approved by the technical department of Techno Metal Post.
- The values of lateral capacity are average values and can be modified, more or less, depending on the characteristics of the existing soil.
- If required, piles may be field welded with extensions to achieve greater loading capacities in poor soil conditions.
- If required, the helical pile and the supporting plate can be galvanized in compliance with standard CAN / CSA G-164-M92 610g / m²