

# WOOD STRUCTURE CONNECTORS

## FLAT PLATE - ADJUSTABLE

### AS3 + PCE-4 OR PCE-5


#### Application

Used for connecting wood post and beams.


#### Technical Specifications

##### Material (standard) :

|                          |                   |
|--------------------------|-------------------|
| Cap                      | CSA G40.21 / 300W |
| Insert                   | ASTM A500 Grade C |
| Threaded rod             | 1" Ø SAE Grade 2  |
| Button head cap screw    | 3/8" Ø - Grade 5  |
| Socket head set screws   | 3/8" Ø - Grade 5  |
| Black Steel Design Life  | min. 50 years     |
| Coating                  | Galvanized        |
| Galvanization compliance | ASTM A123         |

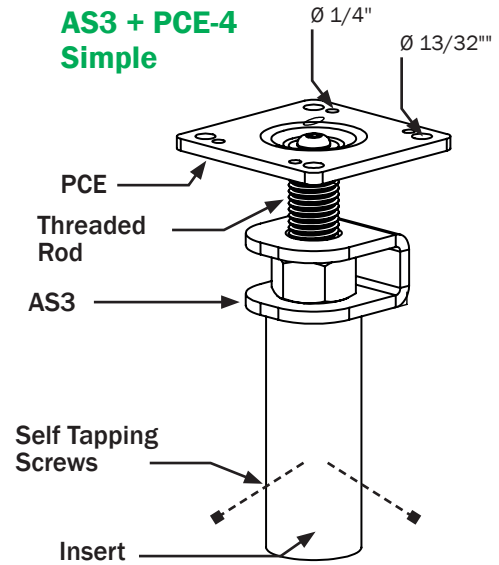

##### AS3 + PCE-5 Double

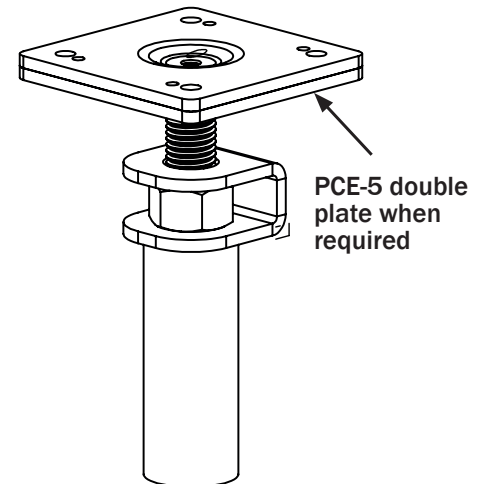

#### Geometry :

| Pile Model | Model No.   | Dimensions       |                  |        |                   |
|------------|-------------|------------------|------------------|--------|-------------------|
|            |             | Length           | Width            | Height | Thickness         |
| P3         | AS3 + PCE-4 | 4"<br>(101.6 mm) | 4"<br>(101.6 mm) | N/A    | 0.25"<br>(6.4 mm) |
|            | AS3 + PCE-5 | 5"<br>(127 mm)   |                  | N/A    | 0.25"<br>(6.4 mm) |